



CORAL

LINEAR ROD PENDANT (x10)


Designed by Oliver Höglund & Ryan Roberts



TECHNICAL DATA


| | | | |
|-----------------------------------|--|---------------------------|--|
| Application | Interior & Outdoor Use (IP44) | Input Power | 100 - 240VAC Power supplied in one end rod (standard) Please advise if you need the middle rod. |
| Glass Colour | Frosted / Clear | Output Voltage (Standard) | 40V DC Driver (350mA Constant Current) Supplied with Remote Driver |
| Rod Suspensions | Matte Black / Matte White / Brass Finish Steel Finish / Bronze | Dedicated LED | 10 x 1W - 350mA (Standard) Lifespan - 60,000+ Hours CRI>90 |
| Ceiling Canopy | Matte Black / Matte White / Brass Finish Steel Finish / Bronze | Colour Temperature | 2700K / 3000K (Standard) / 4000K |
| Dimensions | Glass Diameter: 170mm Linear Rod: 1500mm | Dimming | TRIAC/Phase Dimmable (Standard) Dimmable DALI (additional cost) Please contact for alternative dimming |
| Measurement between vertical rods | 750mm | Warranty | 24 Months / 2 Years |
| Certification | AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN ETL/UL 1598, CSA C22.2#250.0 | | |

DIMENSIONS

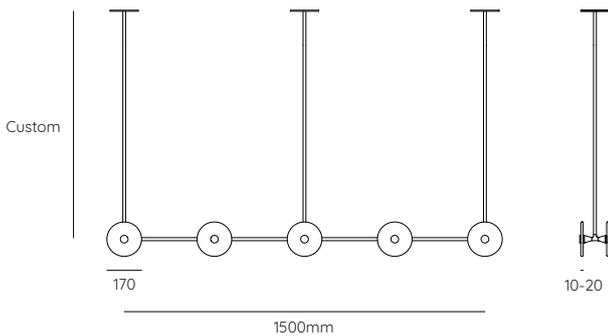

MOUNTING

Installation Instructions

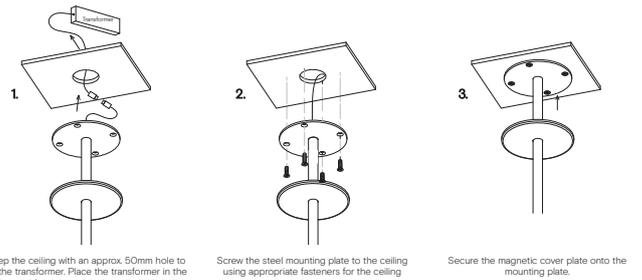

Prep the ceiling with an approx. 50mm hole to fit the transformer. Place the transformer in the ceiling and feed the cable through the hole into the room. Connect the single electrified cable to the transformer.

Screw the steel mounting plate to the ceiling using appropriate fasteners for the ceiling substrate.

Secure the magnetic cover plate onto the mounting plate.

*The transformer needs to be accessible for maintenance purposes.