



## CORAL

### LINEAR ROD PENDANT (x7)

Designed and Handmade by Oliver Höglund & Ryan Roberts

Elevate your space with the Coral Linear Rod pendant light, a captivating modern centrepiece perfect for dining spaces and over kitchen islands. Seven exquisite glass-blown discs are suspended from a beautiful crafted rod structure, available in a selection of finishes including brass finish, steel finish, matte black, matte white, or medium bronze powder coating. Choose from a frosted or clear finish and set the mood of your space with a choice of warm, warm white, or white LED temperatures. Meticulously hand-blown using premium Swedish clear glass, each disc carries the distinctiveness of SOKTAS Glass designs, promising an unparalleled and personalised lighting masterpiece that adds both elegance and character to your space.


Hand Made in Currumbin, Australia.



#### TECHNICAL DATA


Application	Interior & Outdoor Use (IP44)	Input Power	100 - 240VAC
Glass Colour	Frosted / Clear	Output Voltage (Standard)	24V DC Driver (350mA Constant Current) Supplied with Remote Driver
Rod Suspensions	Brass Finish / Matte Black / Matte White / Steel Finish / Medium Bronze Powdercoat	Dedicated LED	7 x 1W - 350mA (Standard) Lifespan - 60,000+ Hours CRI>90
Ceiling Canopy	Brass Finish / Matte Black / Matte White / Steel Finish / Medium Bronze Powdercoat	Colour Temperature	2700K / 3000K (Standard) / 4000K
Dimensions	Glass Diameter: 170mm Linear Rod: 1500mm	Dimming	TRIAC/Phase Dimmable (Standard) Dimmable DALI (additional cost) Please contact for alternative dimming
Measurement between vertical rods - 740mm		Warranty	24 Months / 2 Years
Certification	AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN ETL/UL 1598, CSA C22.2#250.0		

#### DIMENSIONS

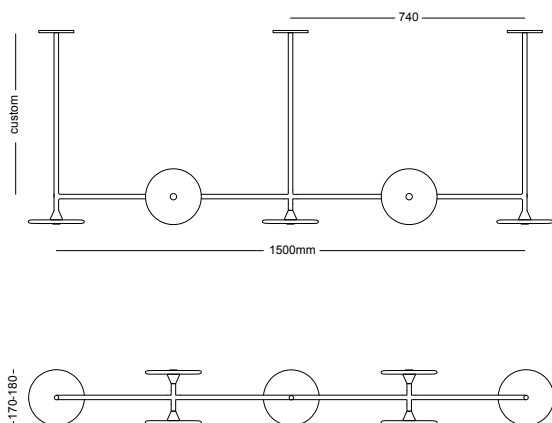


#### MOUNTING

##### Installation Instructions




Prep the ceiling with an approx. 50mm hole to fit the transformer. Place the transformer in the ceiling and feed the cable through the hole into the room. Connect the single electrified cable to the transformer.

\*The transformer needs to be accessible for maintenance purposes.



Screw the steel mounting plate to the ceiling using appropriate fasteners for the ceiling substrate.



Secure the magnetic cover plate onto the mounting plate.