



SOL

WALL LIGHT


Designed by Oliver Höglund & Ryan Roberts



TECHNICAL DATA

Application	Interior & Outdoor Use	Input Power	100 – 240VAC
Glass Colour	Clear	Output Voltage	4V DC Driver (350mA constant current) Supplied with Remote Driver
Wall Plate Finish	Matte Black / Matte White / Brass Finish / Steel Finish / Bronze	Dedicated LED	1W – 350mA (Standard) / 2W (additional cost) Lifespan – 60,000+ Hours CRI>90
Dimensions	Glass: 160 – 200mm Wall Mount: 110 x 15mm Protrudes: 80mm	Lumen Output	150lm (1W) (Standard) / 300lm (2W)
Warranty	24 Months / 2 Years	Colour Temperature	2700K / 3000K (Standard) / 4000K
IP Rating	IP55	Dimming	Triac-Dimmable (Standard) Optional: DALI (additional cost) Please contact for alternative dimming options
Certification	AU/NZ AS/NZS 60598.1, 60598.2.1 EU EN 60598.1, 60598.2.1 US/CAN ETL/UL 1598, CSA C22.2#250.0	Mounting	Integral Wall Bracket


DIMENSIONS

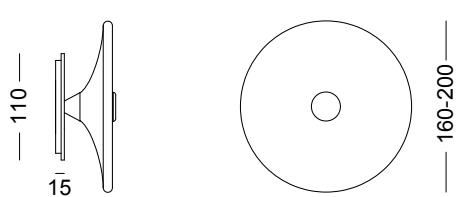

– 80 –


MOUNTING

Installation Instructions




Unscrew the grub screw to separate the screw plate from the circular face plate.

Prep the wall with a hole to match the cutout in the screw plate.



Install the screw plate to the wall using appropriate fasteners for the wall substrate.

Secure the transformer into the wall cavity and feed the cable through the hole into the room. Connect the single electrified cable to the transformer.



Fit the circular wall plate over the mounted screw plate with the supplied M4 screw at the top of the plate.

*The transformer needs to be accessible for maintenance purposes.